



FCFW QUICKWRAP—HEAT SHRINK WRAPAROUND SLEEVE

Heavy wall, flame retardant, heat shrink wraparound sleeve with adhesive for complete environmental sealing without the need for disconnection. Ideal for retrofit protection of exposed connectors and the repair of damaged cable.

FEATURES AND BENEFITS

- Fast and simple installation without interruption of service
- Repair damaged cable jackets
- Suitable for low voltage electrical and mechanical applications
- Proven thermoplastic adhesive ensures an absolutely waterproof seal
- High impact and abrasion resistance
- Flame retardant
- UV resistant
- FCFW QuickWrap can be cut to size in field to suit application
- Rated for 1 kV, 90°C continuous use
- 3:1 shrink ratio
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C

TYPICAL APPLICATIONS

- Connectorized cable repair
- Retrofit protection of connectors
- Cable jacket repairs

INSTALLATION NOTES

FCFW QuickWrap is a one size fits all solution that can accommodate all sizes of cable and connectors. QuickWrapsleeves can be cut to length and width in the field to fit the specific application. Simply wrap the sleeve around the cable or connector, ensuring adequate overlap (allow for a minimum of 3 in or 76 mm), and then firmly apply the closure to hold FCFW QuickWrap together during the heat shrinking process. Please refer to the installation instructions included with each FCFW QuickWrap for more detailed information.



3:1
SHRINK RATIO

-55°C to 110°C
(-67°F to 230°F)
CONTINUOUS OPERATING
TEMPERATURE

MARKETS:

Railway, Electrical, Industrial


STANDARDS:



Heat shrink wraparound sleeve

DIMENSIONS

ORDER NUMBER	LENGTH		WIDTH		RECOMMENDED OVERLAP				EXPANDED SLEEVE I.D. WITH OVERLAP				APPLICATION RANGE		CONDUCTOR SIZE
	IN	MM	IN	MM	MIN		MAX		MIN		MAX		MIN - MAX	MIN - MAX	AWG/MCM
1500	12	305	5.7	145	1.13	28.6	2.36	59.8	0.75	19.1	1.14	29.0	0.50 - 1.00	13 - 25	#2/0 - 350
2000	12	305	7.3	185	1.13	28.6	3.14	79.8	1.00	25.4	1.64	41.7	0.70 - 1.50	18 - 38	250 - 500
2700	12	305	9.5	241	1.20	30.5	4.24	107.7	1.35	34.3	2.32	58.9	1.00 - 2.00	25 - 58	600 - 1000

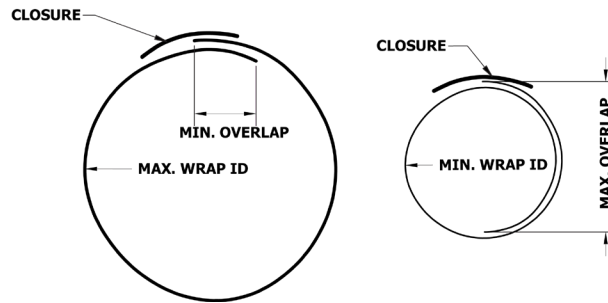

ORDERING

- Please specify the product name plus the options you require
- *Example:* FCFW QuickWrap 1500, 12 in length

Please contact your Customer Service Representative for information on custom colors, sizes, lengths and material data sheet.

FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872

Canada: 800 845 6808

Asia Pacific: +86 512 82280099

Europe: +49 2226 9047 355

All information contained in this datasheet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. Shawcor gives no guarantees in respect to accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Subject to modification.