

UL PLTC UNARMoured TRAY FIELDBUS/PROFIBUS PA, 300V

Fieldbus is the Process Industries digital replacement for analog 4-20mA transmission of process variables. Depending mainly on the current requirement of each device, up to 32 sensors and actuators are possible on a Fieldbus link with a maximum transmission distance of 1900m.

VOLTAGE

300 V

PRODUCT CONSTRUCTION

Insulation:

- FR XLPE (VW-1 rated)
rated: 60°C wet/105°C dry

Shielding (foil-free edge):

- ISOS (standard)
- OS (optional)

Armour:

- Braided Armor for Shipboard (ABS) approval (optional)

Jacket:

- FR PVC outer orange jacket (standard for Fieldbus)
- rated: 90°C to -40°C
- FR PVC outer purple jacket (standard for Profibus)
- rated: 90°C to -40°C
- Black with integral orange stripe (optional)
- Blue for Intrinsically Safe applications
- Thermoset CPE (optional)
- Thermoplastic CPE (optional)
- Thermoplastic LSZH (optional)

Available in:

- Custom insulation/jacket colours

CERTIFICATION/COMPLIANCES

- UL 1277, Tray Cable (TC-ER) (optional)
- Foundation Fieldbus Spec. FF-844, Type "A", H1
- UL 13, Power Limited Tray Cable (PLTC)
- UL 2250, Instrumentation Tray Cable (ITC)
- UL 44, Thermoset Insulated Wires and Cables)
- UL 1685/FT4, Vertical Tray Flame Test rated
- IEEE 1202/383 (70,000 BTU/hr), Vertical Flame Test rated
- ICEA T-30-520 (70,000 BTU/hr), Vertical Flame Test rated
- XLPE (TW 75 rated), 90°C wet/ 105°C dry
- UV sunlight resistant "SUN RES" (all colours)
- Direct burial rated
- 40°C cold bend/impact rated
- Rated for use in hazardous locations:
 - Class I Zone 0 (Intrinsically Safe cables only)
 - Class I Zone 2 (Div 2)

COLOR CODING



- Blue and Orange conductors (standard)

300 V

VOLTAGE

UL Type PLTC

FIELDBUS/PROFIBUS PA

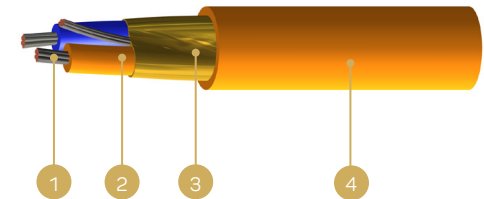

1. Stranded Tinned Copper Pairs
2. FR XLPE (VW-1 Rated) Insulated Pairs (standard)
3. Individual Aluminum/Mylar Shield with Drain Wire Over Each Pair
4. FR PVC Outer Protective Jacket

STANDARDS:



TC

PART NUMBER	NUMBER OF PAIRS	CONDUCTOR SIZE	NOMINAL DIAMETER OVERALL CABLE	CABLE WEIGHT	MAX. PULLING TENSION (PULLING EYE)	MIN. BEND RADIUS (PULL)
		(AWG/MCM)	(in/mm)	(lbs/1000ft) (kg/km)	(lb/kg)	(in/mm)
2F021U160105700	1	16	0.357 / 9.07	66 / 98	41 / 19	6.4 / 163
2F022U160205700	2	16	0.557 / 14.16	149 / 222	82 / 37	10 / 255
2F022U160405700	4	16	0.672 / 17.08	230 / 342	165 / 75	12.1 / 307
2F022U160605700	6	16	0.807 / 20.49	330 / 491	247 / 112	14.5 / 369
2F022U160805700	8	16	0.877 / 22.27	410 / 610	330 / 150	15.8 / 401
2F022U161205700	12	16	1.092 / 27.73	607 / 903	494 / 224	19.7 / 499
2F022U161605700	16	16	1.22 / 30.99	762 / 1134	659 / 299	22 / 558
2F022U162405700	24	16	1.541 / 39.14	1139 / 1695	989 / 449	27.7 / 705
2F021U180105700	1	18	0.313 / 7.95	49 / 73	26 / 12	5.6 / 143
2F022U180205700	2	18	0.485 / 12.31	111 / 165	52 / 24	8.7 / 222
2F022U180405700	4	18	0.564 / 14.33	157 / 233	104 / 47	10.2 / 258
2F022U180605700	6	18	0.696 / 17.68	236 / 351	156 / 71	12.5 / 318
2F022U180805700	8	18	0.754 / 19.16	291 / 432	208 / 94	13.6 / 345
2F022U181205700	12	18	0.937 / 23.81	425 / 633	312 / 142	16.9 / 429
2F022U181805700	18	18	1.102 / 27.99	593 / 882	468 / 212	19.8 / 504
2F022U182405700	24	18	1.315 / 33.41	793 / 1180	624 / 283	23.7 / 601

FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872

Canada: 800 845 6808

Asia Pacific: +86 512 82280099

Europe: +49 2226 9047 55

All information contained in this datasheet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. Shawcor gives no guarantees in respect to accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Subject to modification.

SHAWFLEX PRODUCTS | shawflex.com

Version: 01 2019/JUN/03

 **SHAWCOR**