

CSA UNARMoured TRAY THERMOCOUPLE EXTENSION, 300V

ShawFlex Thermocouple Extension cables offer advantages in cost and mechanical properties when used for connections between thermocouples and instruments.

VOLTAGE

300V

Optional: 600V

PRODUCT CONSTRUCTION

Insulation:

- XLPE (RW90 rated)
- rated: 90°C wet/ 105°C dry

Shielding (foil-free edge):

- ISOS (standard)
- OS (optional)

Armour:

- Aluminum Interlocked Armour (AIA) (standard)

Jacket:

- FR PVC (see Colour Coding for standard colours) rated: 90°C to -40°C

Available in:

- Composite constructions
- Custom insulation/jacket colours
- Extension cables for type E, J, K, N, R, S and T thermocouple alloys

CERTIFICATION/COMPLIANCES

- CSA C22.2 NO. 230, Tray Cables (TC)
- CSA C22.2 NO. 239, Control & Instrumentation Cables (Type CIC)
- CSA C22.2 NO. 38, Thermoset Insulated Wires & Cables (XLPE)
- CSA FT4, UL 1685 FT4, Vertical Tray Flame Test rated
- IEEE 383 & 1202 (70,000 BTU/hr), Vertical Flame Test rated
- ICEA T-30-520 (70,000 BTU/hr), Vertical Flame Test rated
- XLPE (RW90 rated), 90°C wet/ 105°C dry
- UV sunlight resistant "SUN RES" (all colours)
- Direct burial rated
- -40°C cold bend/impact rated
- Rated for use in hazardous locations:
 - Class 1 Zone 0 (Intrinsically Safe cables only)
 - Class I Zone 2 (Div 2)
 - TC-BCD gas groups rated

COLOR CODING


- | | | | |
|---------------|------------|---------|---------------|
| • Type EX: | (+) Purple | (-) Red | Purple jacket |
| • Type JX: | (+) White | (-) Red | Black jacket |
| • Type KX: | (+) Yellow | (-) Red | Yellow jacket |
| • Type NX: | (+) Orange | (-) Red | Orange jacket |
| • Type RX/SX: | (+) Black | (-) Red | Green jacket |
| • Type TX: | (+) Blue | (-) Red | Blue jacket |

300 V

VOLTAGE

CSA Type CIC

THERMOCOUPLE EXTENSION

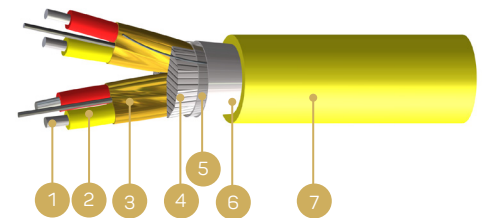

1. Thermocouple Alloys
2. Insulated Thermocouple Alloy Wires
3. Individual Aluminum/Mylar Shielded Pairs with Tinned Copper Drain Wire
4. Polypropylene Fillers
5. Polyester Separator Tape
6. Overall Aluminum/Mylar Shield with Tinned Copper Drain Wire
7. FR PVC Outer Protective Jacket

STANDARDS:



PART NUMBER	NUMBER OF PAIRS	CONDUCTOR SIZE	NORMAL DIAMETERS OVERALL CABLE	CABLE WEIGHT	MAX. PULLING TENSION (PULLING EYE)	MIN. BEND RADIUS (PULL)
		(AWG/MCM)	(in/mm)	(lbs/1000ft) (kg/km)	(lb/kg)	(in/mm)
7B021M1601XY0T8	1	16	0.337 / 8.56	52 / 78	41 / 19	6.1 / 154
7B022M1602XY0T8	2	16	0.498 / 12.65	117 / 174	82 / 37	9 / 228
7B022M1604XY0T8	4	16	0.612 / 15.55	183 / 273	165 / 75	11 / 280
7B022M1606XY0T8	6	16	0.731 / 18.58	262 / 390	247 / 112	13.2 / 334
7B022M1608XY0T8	8	16	0.793 / 20.15	322 / 480	330 / 150	14.3 / 363
7B022M1612XY0T8	12	16	1.007 / 25.57	493 / 733	494 / 224	18.1 / 460
7B022M1624XY0T8	24	16	1.387 / 35.23	890 / 1324	989 / 449	25 / 634
7B021M1801XY0T8	1	18	0.315 / 8	43 / 64	26 / 12	5.7 / 144
7B022M1802XY0T8	2	18	0.462 / 11.73	96 / 143	52 / 24	8.3 / 211
7B022M1804XY0T8	4	18	0.568 / 14.43	147 / 218	104 / 47	10.2 / 260
7B022M1806XY0T8	6	18	0.676 / 17.17	207 / 308	156 / 71	12.2 / 309
7B022M1808XY0T8	8	18	0.732 / 18.6	253 / 377	208 / 94	13.2 / 335
7B022M1812XY0T8	12	18	0.929 / 23.6	386 / 575	312 / 142	16.7 / 425
7B022M1824XY0T8	24	18	1.274 / 32.36	685 / 1019	624 / 283	22.9 / 583
7B021M2001XY0T8	1	20	0.299 / 7.59	38 / 56	16 / 7	5.4 / 137
7B022M2002XY0T8	2	20	0.435 / 11.06	83 / 124	32 / 15	7.8 / 199
7B022M2004XY0T8	4	20	0.506 / 12.85	112 / 167	64 / 29	9.1 / 231
7B022M2006XY0T8	6	20	0.636 / 16.15	176 / 261	96 / 44	11.4 / 291
7B022M2008XY0T8	8	20	0.688 / 17.47	212 / 316	128 / 58	12.4 / 314
7B022M2012XY0T8	12	20	0.833 / 21.16	293 / 436	192 / 87	15 / 381
7B022M2024XY0T8	24	20	1.192 / 30.28	568 / 845	384 / 174	21.5 / 545

FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872

Canada: 800 845 6808

Asia Pacific: +86 512 82280099

Europe: +49 2226 9047 55

All information contained in this datasheet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. Shawcor gives no guarantees in respect to accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Subject to modification.

SHAWFLEX PRODUCTS | shawflex.com

Version: 02 2020/AUG/19

 **SHAWCOR**