



## DERAY®-MGT 5-SYSTEM – TERMINAL SEALING SOLUTION

Adhesive lined heat shrink system specifically designed to insulate, seal and protect terminals in automotive assemblies.

### FEATURES AND BENEFITS


- High shrink ratio to fit varying terminal sizes
- Seals and protects against water, moisture and chemicals
- Adhesive bonds readily to PVC, XLPE and PP-EPDM cable jackets
- Shrinks rapidly for quick installation
- Shrink ratio: 6:1
- Continuous operating temperature: -40°C to 125°C
- Shrink temperature: 120°C min.
- Combination with DERAY®-SpliceMelt if additional adhesive is needed

### STANDARDS

- FCA Standard
- Fiat Norm 91309/1

### TYPICAL APPLICATIONS

- Ground terminals
- Eyelet terminals

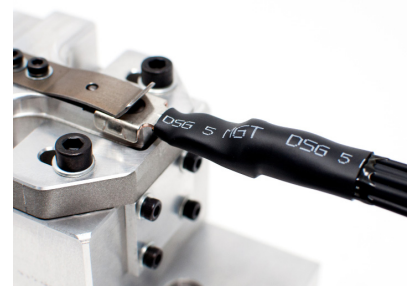

**6:1**  
SHRINK RATIO

**-40°C to 125°C**  
**(-40°F TO 257°F)**  
CONTINUOUS OPERATING  
TEMPERATURE

### MARKETS:

Automotive

### STANDARDS:



# Water Blocking Solution System


## DIMENSIONS: DERAY®-MGT 5

ORDER NUMBER	EXPANDED		ORECOVERED				DELIVERY UNITS	
	Internal Diameter (min) D		Internal Diameter (max) d		Total Wall Thickness (nom) W		MM	IN
	MM	IN	MM	IN	MM	IN		
DERAY®-MGT 5	16.0	0.629	2.5	0.098	2.35	0.093	45.0	1.77
DERAY®-MGT 5	16.0	0.629	2.5	0.098	2.35	0.093	55.0	2.17



## DIMENSIONS: DERAY®-SPLICEMELTBAND

ORDER NUMBER	WIDTH		THICKNESS		DELIVERY UNITS	
	MM	IN	MM	IN	MM	IN
DERAY®-SpliceMeltband	10.0	0.394	1.5	0.059	30.0	1.181

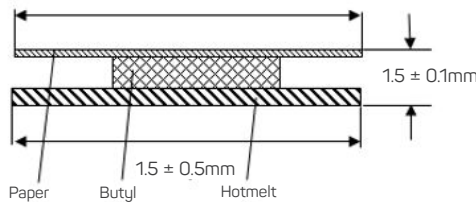

## ORDERING

Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.

- Please specify the product name, order number and options you require
- *Example:* DERAY®-MGT 5-System, 45mm

Please contact your Customer Service Representative for information on custom colors, sizes, lengths and material data sheet.

## FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872

Canada: 800 845 6808

Asia Pacific: +86 512 82280099

Europe: +49 2226 9047 355

All information contained in this datasheet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. Shawcor gives no guarantees in respect to accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Subject to modification.