

DERAY®-SPLICEMELTBAND – WATER BLOCKING SOLUTION

The DERAY®-SpliceMeltband system seals and environmentally protects connectors and cable bundles.

FEATURES AND BENEFITS

- A specially designed mastic lined adhesive tape sealing system that provides longitudinal water sealing for cable bundles, plug connectors and splices
- Cables are embedded individually into the adhesive tape to ensure 100% sealing
- Good chemical and fuel resistance
- Good adhesion to PVC, XLPE and PP-EPDM wire insulating materials

STANDARDS

- Approved to OEM longitudinal water blocking specifications

TYPICAL APPLICATIONS

- Water/moisture ingress elimination
- Abrasion protection and strain relief



100%
SEALING

-40°C to 125°C
(-40°F to 257°F)
CONTINUOUS OPERATING
TEMPERATURE

MARKETS:

Automotive, Industrial


STANDARDS:



Water blocking solution

DIMENSIONS

ORDER NUMBER	WIDTH		THICKNESS		DELIVERY UNITS	
	MM	IN	MM	IN	M	FT
6210001007	10.0	0.394	1.50	0.059	500	1640
6210001507	15.0	0.591	1.50	0.059	500	1640

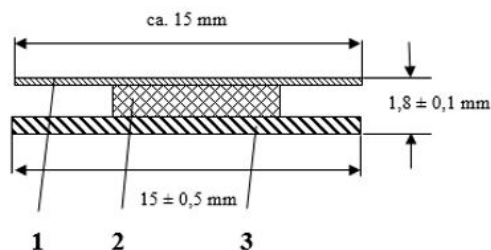

INSTALLATION

The DERAY®-SpliceMeltband system consists of two primary components:

- DERAY®-SpliceMeltband mastic adhesive strips, used to seal all of the individual elements of the cable bundle.
- DERAY®-SpliceMelt heat shrink tubing is cross-linked polyolefin tubing that is used to cover and encapsulate the entire installation.

DERAY®-WorkMan or DERAY®-DockMan shrink ovens are recommended for repeatable application.

ORDERING

- Select options:
 - Length: Standard spool length or cut pieces on request
- Please specify the product name, order number and options you require
- *Example:* DERAY®-SpliceMeltband, 6210001007, 10-1,5, 500 m reel

Please contact your Customer Service Representative for information on custom colors, sizes, lengths and material data sheet.

FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872

Canada: 800 845 6808

Asia Pacific: +86 512 82280099

Europe: +49 2226 9047 355

All information contained in this datasheet is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. Shawcor gives no guarantees in respect to accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Subject to modification.